

No. 07 OREGON

Internal Doors

Make the right choice every time with a timeless door.



A stylish finish

This range of doors are made using outstanding American white oak real wood veneer which will give any room an assured style.

Sound reduction

A solid construction gives this door impressive acoustic properties, meaning you can always enjoy peace and quiet.

Life saver

Fire door options make this the perfect choice for owners who want a little extra peace of mind.

Make a pair

Our pair makers allow you to put two doors together to create a pair. Perfect to create a statement feature in bigger spaces.

Find yours

Available in many designs, with a mixture of styles including solid panel and glazed options.




Features & benefits:

- Timeless style
- Luxury white oak veneer
- Sound reducing solid core
- 30-minute fire door options available
- Toughened safety glass on glazed doors
- Space saving bi-fold door solutions available
- 5-year guarantee

DOOR DESIGNS



4 Panel 10 Light Clear 15 Light Clear 2 Light Mackintosh 2 Light Clear Cottage Cottage Etch 4 Panel Bi-Fold Cottage Bi-Fold Cottage Horizontal Cottage 3 Light Clear Horizontal Aston 3 Panel Aston 3 Light Clear/ Obscure

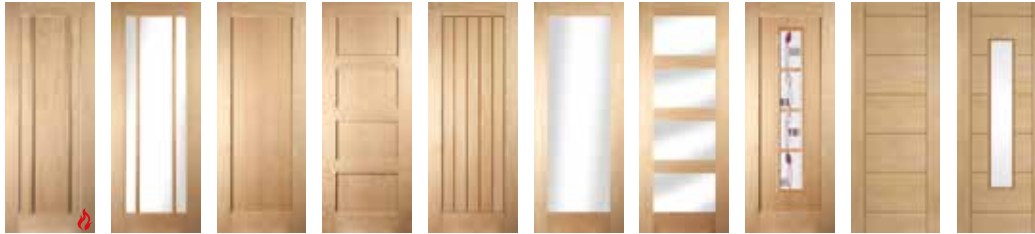

Worcester Worcester 3 Light Clear Shaker 1 Panel Shaker 4 Panel Shaker Recessed Cottage Shaker 1 Light Clear/ Obscure Shaker 4 Light Clear Shaker 4 Light Mackintosh Ladder Ladder 1 Light Clear

OPTIONAL OAK PAIR MAKER



| | |
|--------------------------------|---|
| Material specification | Standard - White Oak Veneer, Solid Particle Board Core Fire doors - White Oak Veneer, Solid Fire Rated Core |
| Finish | Unfinished, requiring decoration |
| Glass specification | 4mm (Clear/Decorative/Obscure - depending on design) Toughened Glass Fire doors - 7mm Pyroguard Clear Glass |
| Accessory options | Oak pair maker optional extra |
| Decoration requirements | It is essential that the door is completely finished on the two faces and all FOUR edges plus any cut-outs for locks, handles and hinges etc. Prior to finishing or sealing, lightly sand any handling marks. Usually 3 top coats are satisfactory but we strongly recommend you that you treat this door in accordance with the stain or varnish manufacturer's instructions. A light sanding between coats will provide the best finish. Adequate drying time must be allowed between each coat. Failure to seal the doors accordingly will invalidate any claims. |
| Storage | Doors must be stored flat in cool, dry conditions avoiding direct contact with sunlight before the door has been finished. |
| Trimming allowance | Standard doors - If the door is to be reduced in size, an equal amount of timber should be trimmed from either side or bottom, this must never exceed 10mm in total, 5mm each side and 6mm from the bottom. We do not recommend trimming the top of the door. Fire doors - If the door is to be reduced in size, an equal amount of timber should be trimmed from either side or bottom, this must never exceed 10mm in total, 5mm each side and 6mm from the bottom. We do not recommend trimming the top of the door. Bi-folds doors - No trim allowance |
| Guarantees | 5 Year Manufacturing |
| Sustainability | FSC Mix 70% |